



Modular Flexibility

Non-Illuminated Devices

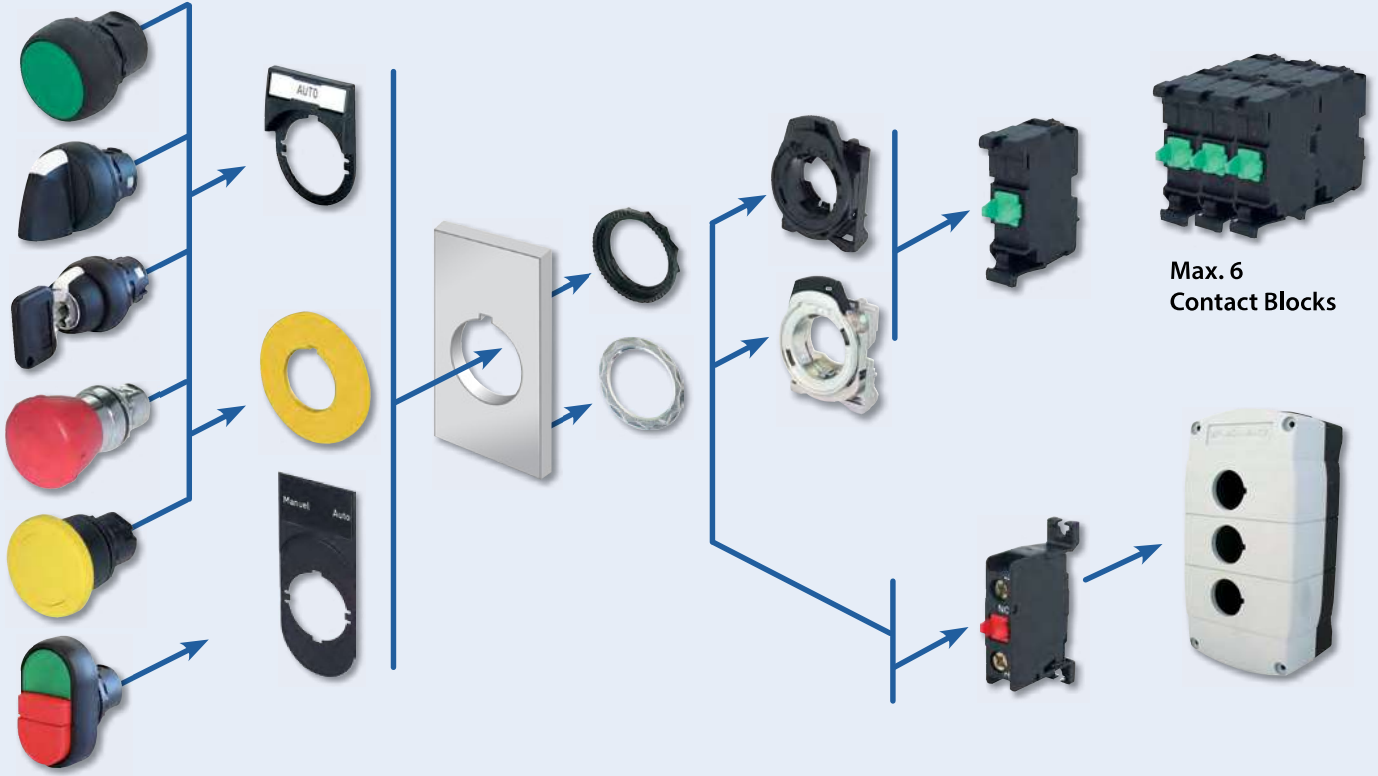

Illuminated Devices

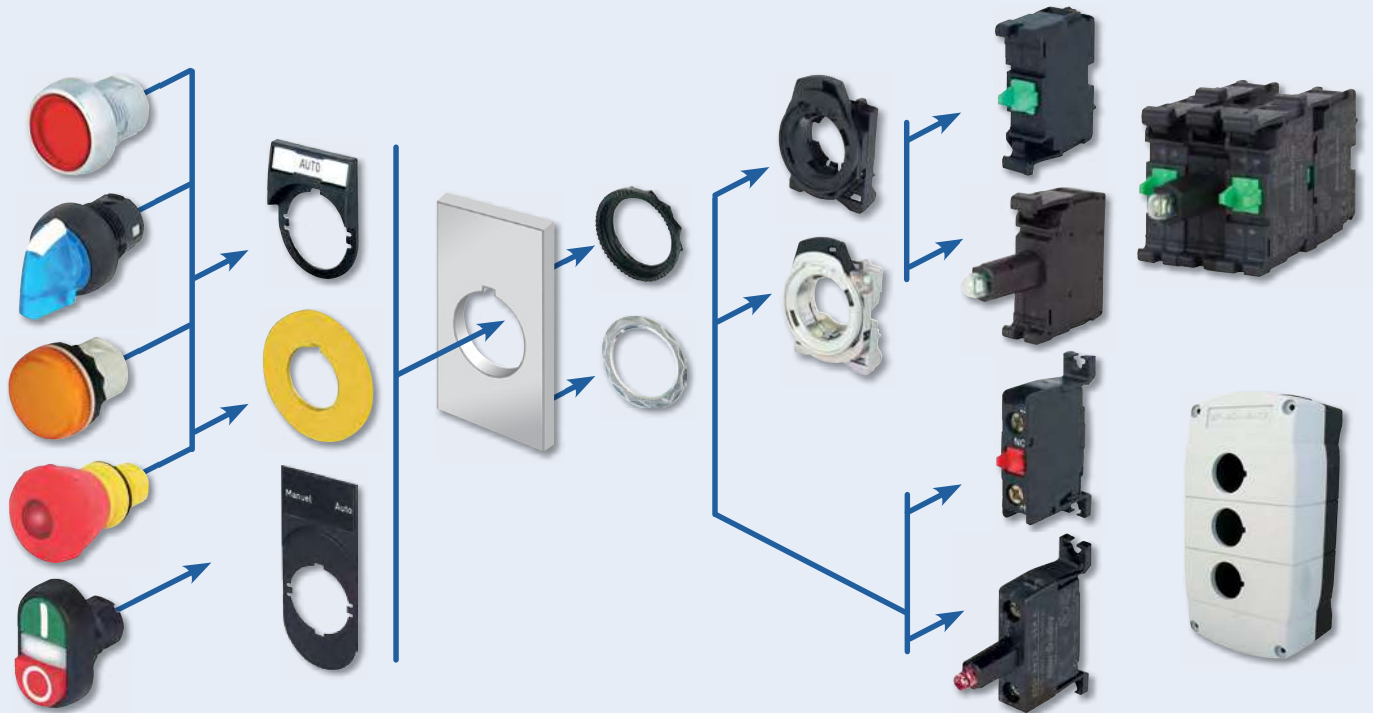

3-Position Key-Operated Selector Switches, Non-Illuminated




Key-Operated Selector Switch
Cat. No. 800FP-KM31R



Key-Operated Selector Switch
Cat. No. 800FM-KM31R

Switching Angle



Target Table and Operator Position				
Contact Type♦	Position on Mounting Latch			
N.O.	Left	X	O	O
	Right	O	O	X
	Center	X	O	X
N.C.	Left	O	X	X
	Right	X	X	O
	Center	O	X	O

Note: X = Closed/O = Open

♦ Contact selection is limited to the following options, consult your local Rockwell Automation sales office or Allen-Bradley distributor for other options.

800F M - KM3 3
 a b c d

a

Operator Construction	
Code	Description
P	Round plastic operator (IP66, Type 4/13)
M	Round metal operator (IP66, Type 4/13)

b

Operator Type	
Code	Description
KM3	Maintained
KR3	Spring return from right
KL3	Spring return from left
KB3	Spring return from both

c

Key Removal Position★	
Code	Type
1	Left
3	All
4	Center
5	Left/center
7Δ	Center/right

d

See page 16 for optional key codes†§*

- ★ Key removal in maintained positions only.
- † Keyed operators are IP66, Type 4/13.
- § Not intended for high security applications. Interoperability is possible with certain key/cylinder lock combinations. Consult your local Rockwell Automation sales office or Allen-Bradley distributor for interoperability information.
- ‡ For replacement Ronis keys, consult your local Rockwell Automation sales office or Allen-Bradley distributor.
- Δ Key removal position only valid with operator types 800F_-KM3 and 800F_-KL3.